

S-A-B® Gate

Longitudinal Steel Barrier Gate

- + Open/close in under 10 minutes
- + Expandable design
- + High flexibility & safety
- + Quick & easy to install
- + Meets EN1317-4 Criteria

FEATURES

- + High containment level H2
- + Can be deployed on gradients
- + Ideal during snow circumstances
- + Robust transition design
- + Opening system from 1 to more than 100 elements
- + Easily opens without electricity, and closes in less than 10 minutes
- + Ideally suited for rerouting traffic and for emergency access

WHERE TO USE

- + The S-A-B System is designed to shield median barrier openings while allowing emergency vehicle access when needed.



Physical Specifications

Classification	Longitudinal Barrier Gate
Length	8, 68-108, 50 m
Module Length	4340 mm
Width	500 mm
Height	1100 mm
Weight	123 kg/m
Test Level	EN1317-2-4



Safely Shields Median Openings

The S-A-B System presents a cost-effective solution to the problem of providing openings in median barrier. Highway agencies and local governments need this capability for emergency vehicle access and evacuation, traffic re-routing, and work zone and maintenance applications. The S-A-B system allows impact absorption with reduced dynamic deflection and redirection of small and heavy vehicles at a small angle. The S-A-B system can be opened fully or partially as required, quickly and without the need of special equipment.



Frequently asked questions

Is the S-A-B System suitable for all road types?


Yes, the S-A-B system is suitable for motorways, country roads and city streets for all speed categories.

Is the S-A-B System easy to install?

Yes, with the use of proper tools, a trained crew of four workers, the estimated time for installation is about four hours.

What types of barrier can the S-A-B System be attached to?

The S-A-B System easily attaches to all standard concrete and guardrail styles.

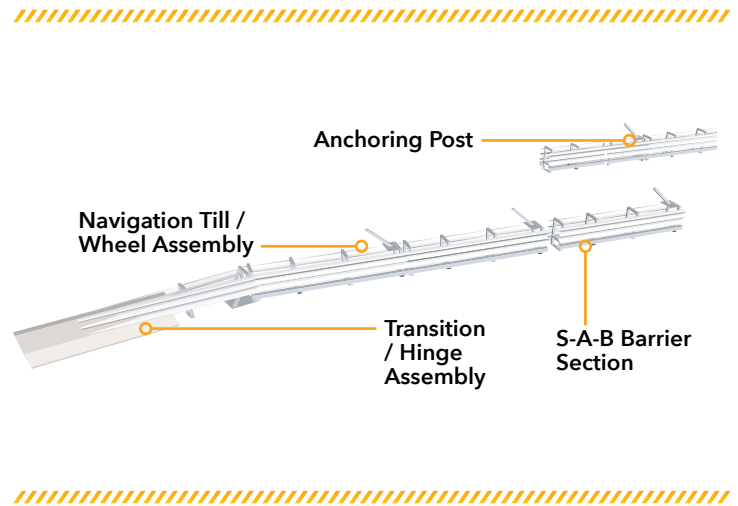

DISTRIBUTED BY:

LINDSAY™

18135 Burke Street, Suite 100 | Omaha, NE 68022
+1 (402) 829-6800 | U.S. Toll Free: (888) 800-3691

lindsay.com