


ABSORB-M™

Non-Redirective Crash Cushion

- + Anchorless installation - no foundation required
- + Easy to deploy and remove
- + MASH TL-2 and TL-3 compliant

FEATURES

- + Rapid deployment and retrieval
- + No ground anchoring required
- + Universal transition
- + Narrow footprint
- + Can be deployed on almost any road surface
- + Shortest MASH TL-3 non-redirective, anchorless crash cushion
- + Acceptable for use on anchored and unanchored barrier
- + Approved for temporary and permanent applications

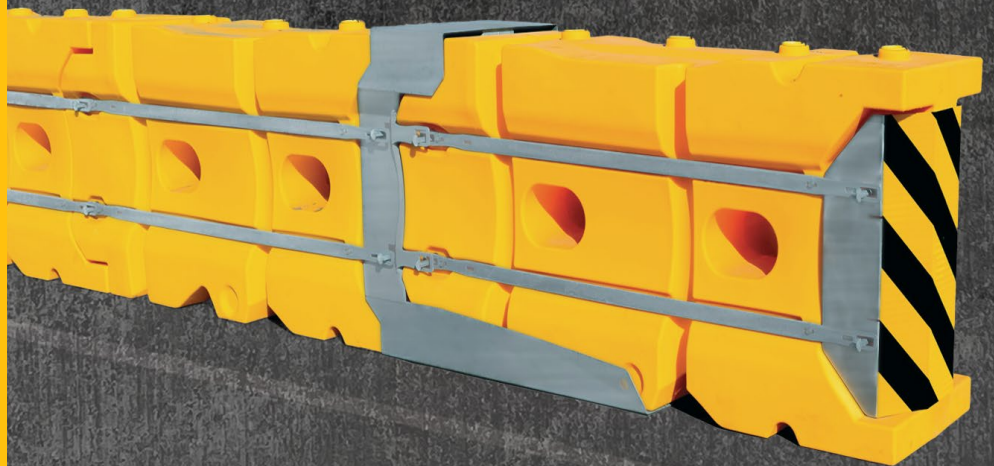

Physical Specifications

	MASH TL-3	MASH TL-2
Length	21' (640 cm)	14' 7½" (446 cm)
Width	24" (61 cm)	24" (61 cm)
Height	42" (107 cm)	42" (107 cm)
Element Weight Empty	180 lb (82 kg)	180 lb (82 kg)
Element Weight Full	2270 lb (1030 kg)	2270 lb (1030 kg)
Elements	3	2



Narrow Anchorless Water-Filled Crash Cushion

No ground anchoring, easy deployment / removal, and the shortest length in its class make the ABSORB-M system the contractor's choice for a work zone ready MASH crash cushion. At 24" (61 cm) wide, it is suited for narrow areas where roadway and work space are limited. The system utilizes interchangeable, stackable elements to reduce inventory costs, and a universal transition takes time and complexity out of installation.



Frequently Asked Questions

What types of barrier can the ABSORB-M system be used on?


The ABSORB-M system is designed to accommodate a variety of safety shape and constant slope barriers between 32" to 42" tall.

Can the ABSORB-M system be moved while filled with water?

Yes, the system is rigid enough to be repositioned when filled with water by lifting each element from the integrated forklift ports.

Can the ABSORB-M system be used during cold weather?

Yes, since ABSORB-M elements have no internal steel parts, the use of any approved anti-icing chemical is acceptable.

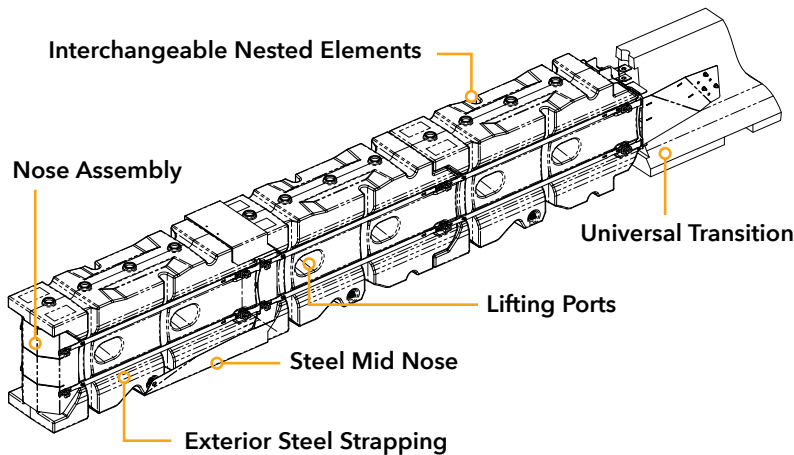

DISTRIBUTED BY:



18135 Burke Street, Suite 100 | Omaha, NE 68022
+1 (402) 829-6800 | U.S. Toll Free: (888) 800-3691