

TAU-XR™

Redirective, Non-Gating Crash Cushion

- + Meets low-maintenance & severe duty standards
- + Quick and easy to install and repair
- + MASH TL-3 Tested


FEATURES

- + **Xpress Repair:** less than 30 minutes to reset and repair after impact
- + **Easy Install:** delivered fully assembled for quick installation
- + **Durable:** double-rail system and non-flaring side panels for maximum performance and minimal damage
- + **Budget-Friendly:** reduced total lifecycle cost
- + **Remote Monitoring:** fully tested with ImpactAlert and RoadConnect



Physical Specifications

	MASH TL-3	
Length	21' (640 cm)	14' 7½" (446 cm)
Width	24" (61 cm)	24" (61 cm)
Height	42" (107 cm)	42" (107 cm)

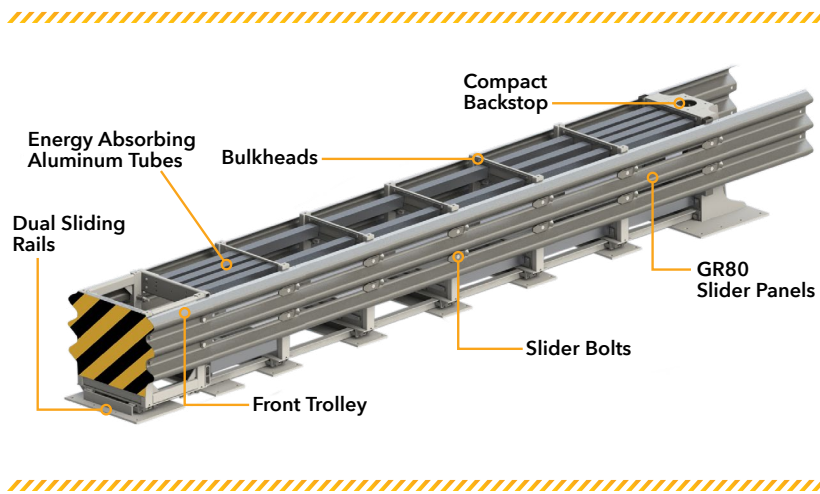

Frequently Asked Questions

What components of the TAU-XR System need to be replaced after a design impact?

Typically, after a head-on impact, 32 aluminum tubes will need replaced. After a side impact, as few as two side panels will need replaced.

What type of foundation is needed for the TAU-XR System?

Just like the TAU-M™, the TAU-XR can be anchored to a minimum 6" (152 mm) reinforced concrete foundation.

What transitions are available?

TAU-XR uses standard three-beam panels allowing standard transition methods to various roadside hardware and barriers. Proprietary transitions with nested angled and standard end panels were tested and are available. Wide transitions up to 52 inches are also available.

What are the major differences between the TAU-M System and the TAU-XR System?

The TAU-M uses heavy large-diameter steel cables to attenuate side impacts,

and large plastic barrels to attenuate the energy during head-on impacts. The TAU-XR uses double heavy-duty steel rails for side impacts, and small square aluminum tubes for head-on impacts.

Can other TAU Systems be retrofitted to a TAU-XR System?

No. The TAU-XR is a new crash cushion design. Upgrade kits are not available for other TAU systems.

MASH TL-3 The TAU-XR Crash Cushion

Tested to MASH Test Level 3, the TAU-XR is a redirective, non-gating crash-attenuating system designed specifically for high-frequency impact locations with the safety of maintenance workers as a top priority. The crushable energy-absorbing aluminum tubes are simple and intuitive to replace. The TAU-XR can be repaired in less than 30 minutes after head-on or side impacts, minimizing workers' exposure to traffic. The TAU-XR is designed for severe duty, built with structural steel rails and mid supports to minimize damage during impacts. Plus, it has one of the lowest life cycle costs in its class. With installers in mind, the TAU-XR is delivered fully assembled with accessible anchors, saving hours of installation time and minimizing exposure to traffic. With Lindsay's optional ImpactAlert™ remote monitoring device with RoadConnect™ asset management platform, DOTs and maintenance contractors can be notified as soon as one-minute after an impact occurs.

DISTRIBUTED BY:



18135 Burke Street, Suite 100 | Omaha, NE 68022
+1 (402) 829-6800 | U.S. Toll Free: (888) 800-3691

lindsay.com