


## S-A-B® | LONGITUDINAL STEEL BARRIER GATE

- OPEN/CLOSE IN LESS THAN 10 MINUTES
- EXPANDABLE DESIGN
- QUICK AND EASY TO INSTALL
- HIGH FLEXIBILITY AND SAFETY
- MEETS EN1317-2 AND ENV 1317-4 CRITERIA



## PHYSICAL SPECIFICATIONS

Classification	Longitudinal Barrier Gate
Length	8,68-108,50 m
Width	500 mm
Height	1100 mm
Weight	123 kg/m
Test Level	EN1317-2- 4

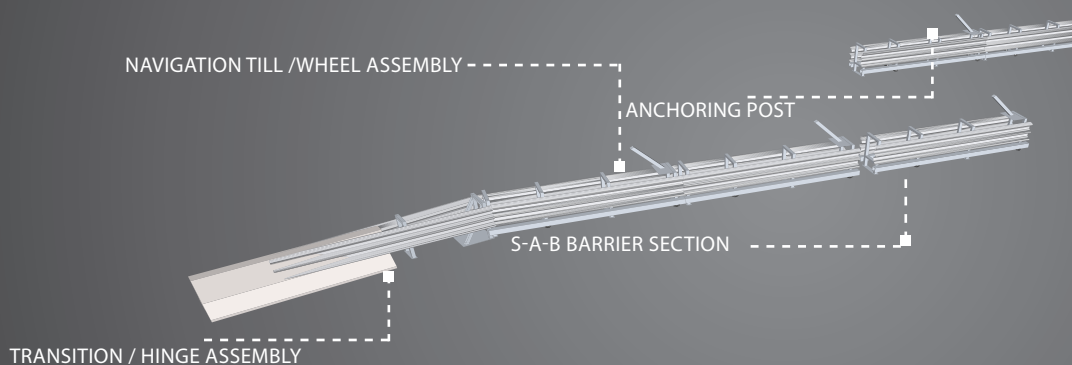

## SAFELY SHIELDS MEDIAN OPENINGS

The S-A-B System presents a cost-effective solution to the problem of providing openings in median barrier. Highway agencies and local governments need this capability for emergency vehicle access and evacuation, traffic re-routing, and work zone and maintenance applications. The S-A-B system allows impact absorption with reduced dynamic deflection and redirection of small and heavy vehicles at a small angle. Its special feature consists in the fact that it can be opened fully or in part as required, quickly and without the need of special equipment.

## FREQUENTLY ASKED QUESTIONS

### Is the S-A-B System suitable for all road types?

Yes, the S-A-B System is suitable for motorways, country roads, city streets for all speed categories.

### Is the S-A-B System easy to install?

Yes, with the use of proper tools a trained crew of 4 workers, the estimated time for installation is about four hours.

### What types of barrier can the S-A-B System be attached to?

The S-A-B System easily attaches to all standard concrete and guardrail styles.

## FEATURES

- » High containment level H2
- » Can be deployed on gradients
- » Ideal during snow circumstances
- » Robust transition design
- » Opening system from 2 to 25 elements
- » Easily opens without electricity
- » And closes in less than 10 minutes.
- » The only gate system tested according part 2 and 4 of the EN 1317
- » Ideally suited for rerouting traffic and for emergency access

## WHERE TO USE

The S-A-B System is designed to shield median barrier openings while allowing emergency vehicle access when needed.

DISTRIBUTED BY:



Snoline spa

Via F. Baracca 19/23 • 20056 Trezzo sull'Adda (MI) • Italia • Tel. +39 02909961 • e-mail: info@snoline.com  
General details for the SAB are subject to change without notice to reflect improvements and upgrades.

Additional information is available from Snoline S.P.A. © Lindsay Transportation Solutions